



Key specifications	IQ8AC-72-M-US @240 VAC	IQ8AC-72-M-US @208 VAC
Peak output power	366 VA	350 VA
Nominal grid voltage (L-L)	240 V split-phase (L-L), 180°	208 V single-phase (L-L), 120°
Nominal frequency	60 Hz	60 Hz
CEC weighted efficiency	97.0%	96.5%
Maximum input DC voltage	60 V	60 V
MPPT voltage range	28–45 V	28–45 V
Maximum module I _{sc}	20 A	20 A
Ambient temperature	–40°C to 65°C (–40°F to 149°F)	

IQ8AC Microinverter

power connection capability to convert DC power to AC power efficiently



Simple


- Lightweight and compact with plug-and-play connection
- Power line communication (PLC) feature for monitoring
- Power module with simple two-wire cabling

Reliable

- Overlives power even when the grid is down
- More than one million cumulative hours of testing
- Industry-leading limited warranty of up to 25 years
- Class II double-insulated enclosure
- Optimized for the latest high-power PV modules

Intelligent Monitoring

- Complies with the latest advanced grid support
- Remote automatic updates for the latest grid requirements
- Configurable to support a wide range of grid profiles
- Meets CA Rule 21 (EL 150-5A) and IEEE Std 1547-2018 (S1, S10, S11, S12)

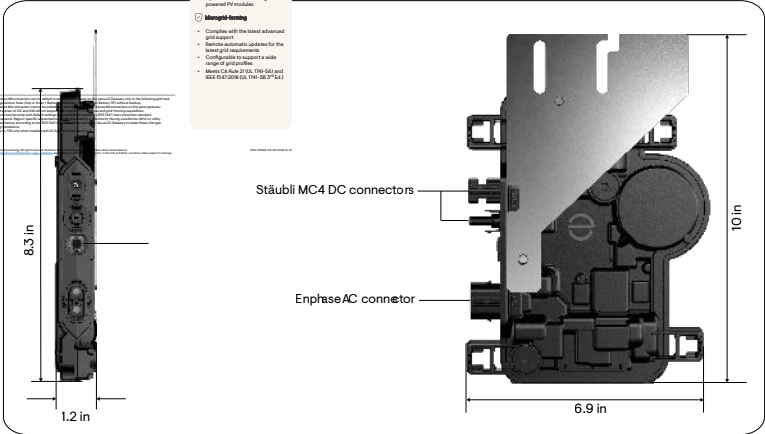

Input data (DC)	Units	IQ8AC-72-M-US	
Commonly used module pairings ⁵	W	295–500	
Module compatibility	—	To meet compatibility, PV modules must be within the following maximum input DC voltage and maximum module I_{sc} . Module compatibility can be checked at https://enphase.com/installers/microinverters/calculator .	
MPPT voltage range	V	28–45	
Operating range	V	18–58	
Minimum/Maximum start voltage	V	22/58	
Maximum input DC voltage	V	60	
Maximum continuous input DC current	A	14	
Maximum input DC short-circuit current	A	25	
Maximum module I_{sc}	A	20	
Overvoltage class DC port	—	II	
DC port backfeed current	mA	0	
PV array configuration	—	Ungrounded array; no additional DC side protection required; AC side protection requires a maximum of 20 A per branch circuit	
Output data (AC)	Units	IQ8AC-72-M-US @240 VAC	IQ8AC-72-M-US @208 VAC
Peak output power	VA	366	350
Maximum continuous output power	VA	349	345
Nominal grid voltage (L-L)	V	240, split-phase (L-L), 180°	208, single-phase (L-L), 120°
Minimum and maximum grid voltage ⁶	V	211–264	183–229
Maximum continuous output current	A	1.45	1.66
Nominal frequency	Hz	60	
Extended frequency range	Hz	47–68	
AC short-circuit fault current over three cycles	A_{rms}	2.70	
Maximum units per 20 A (L-L) branch circuit ⁷	—	11	9
Total harmonic distortion	%	<5	
Overvoltage class AC port	—	III	
AC port backfeed current	mA	18	
Power factor setting	—	1.0	
Grid-tied power factor (adjustable)	—	0.85 leading ... 0.85 lagging	
Peak efficiency	%	97.3	97.2
CEC weighted efficiency	%	97.0	96.5
Nighttime power consumption	mW	30	22
Mechanical data	IQ8AC-72-M-US		
Ambient temperature range	–40°C to 65°C (–40°F to 149°F)		
Relative humidity range	4% to 100% (condensing)		
DC connector type	Stäubli MC4		

⁵ No enforced DC/AC ratio.

⁶ Nominal voltage range can be extended beyond nominal if required by the utility.

⁷ Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.

Mechanical data	IQ8AC-72-M-US
Dimensions (H × W × D); Weight	212 mm (8.3") × 175 mm (6.9") × 30.2 mm (1.2"); 1.1 kg (2.43 lb)
Cooling	Natural convection – no fans
Approved for wet locations; pollution degree	Yes; PD3
Enclosure	Class II double-insulated, corrosion-resistant polymeric enclosure
Environmental category; UV exposure rating	NEMA Type 6; Outdoor
Compliance	IQ8AC-72-M-US
Certifications	CA Rule 21 (UL 1741-SA), UL 62109-1, IEEE 1547:2018 (UL 1741-SB 3rd Ed.), FCC Part 15 Class B, ICES-0003 Class B, CAN/CSA-C22.2 NO. 107.1-01. This product is UL Listed as PV rapid shutdown equipment and conforms with NEC 2014, NEC 2017, NEC 2020 and NEC 2023 section 690.12 and C22.1-2018 Rule 64-218 rapid shutdown of PV systems for AC and DC conductors when installed according to the manufacturer's instructions.

Components of the Enphase Energy System



IQ Battery

All-in-one AC-coupled storage solution that integrates seamlessly with your solar energy system, providing reliable backup power and intelligent energy management for maximum performance and energy savings.



IQ System Controller

The IQ System Controller connects the home to the grid power, IQ Batteries, generator and solar PV with microinverters.



IQ Combiner/IQ Gateway

The IQ Combiner/IQ Gateway is a device that performs energy management, provides internet connectivity, and integrates with the IQ Series Microinverters to provide complete control and insights into the Enphase Energy System.



IQ Cable

The IQ Cable is a continuous-length 12-AWG cable with pre-installed connectors for IQ Microinverters that support faster, simpler, and more reliable installations. The cable is handled like standard outdoor-rated electrical wire, allowing it to be cut, spliced, and extended as needed.

Revision history

Revision	Date	Description
DSH-00046-5.0	December 2024	Updated information on backward compatibility with IQ7 Series Microinverters.
DSH-00046-4.0	February 2024	Updated the information about IEEE 1547 interconnection standard requirements.
DSH-00046-3.0	October 2023	Included NEC 2023 specification in the "Compliance" section.
DSH-00046-2.0	September 2023	Updated module compatibility information.
DSH-00046-1.0	May 2023	Preliminary release.
		Previous releases.